

ASSEMBLY INSTRUCTIONS:

FOR BOTH SINGLE AND DUAL TYPES:

1. SLIDE THE FIRST CHARGER UNIT INTO THE EQUIPMENT BRACKET FROM THE TOP AND SECURE WITH A PROVIDED 10-32 X 1/4" SCREW THROUGH THE TAB IN THE EQUIPMENT BRACKET. (CHARGER CAN GO IN EITHER LEFT OR RIGHT SIDE OPENING IN THE BRACKET)

NOTE: BEFORE TIGHTENING SCREWS, MAKE SURE THAT THE PINS IN THE CHARGER ARE PROJECTING INTO THE SMALL HOLES IN THE EQUIPMENT BRACKET AND COVER.

FOR SINGLE CHARGER TYPE:


2. SLIDE THE COVER UP FROM THE BOTTOM AND SECURE ONE SIDE THROUGH THE TAB IN THE EQUIPMENT BRACKET, SECURE THE OTHER SIDE OF THE COVER INTO THE THREADED HOLE IN THE CHARGER. BEFORE TIGHTENING SCREWS, MAKE SURE THAT THE PINS IN THE CHARGER ARE PROJECTING INTO THE SMALL HOLES IN THE EQUIPMENT BRACKET AND COVER.

FOR DUAL CHARGER TYPE:

3. INSTALL THE SIDE BRACKET BY SECURING IT TO THE INSTALLED CHARGER WITH THE PROVIDED 10-32 X 1/4" SCREW. BE SURE TO SLIDE THE BRACKET UP UNTIL IT IS SECURE AGAINST THE BOTTOM OF THE EQUIPMENT BRACKET.
4. SLIDE THE SECOND CHARGER INTO THE EQUIPMENT BRACKET AND SECURE WITH THE PROVIDED 10-32 X 1/4" SCREW.

BOTH TYPES:

5. INSTALL THE EQUIPMENT BRACKET WITH THE INSTALLED CHARGERS INTO THE CONSOLE AND SECURE WITH 4 INCLUDED TORX SCREWS.

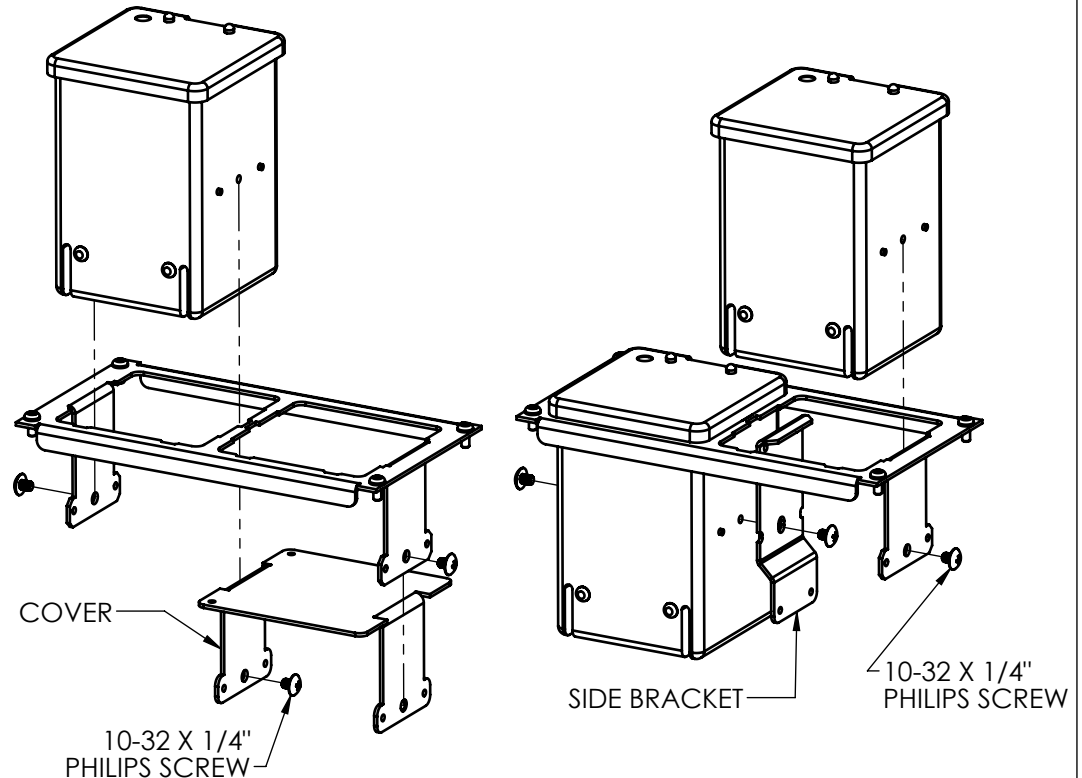

SINGLE CHARGER TYPE

DUAL CHARGER TYPE

HAVIS HAVIS, INC.		75 JACKSONVILLE RD. WARMINSTER, PA. 18974 1-800-524-9900
TITLE: ASSEMBLY INSTRUCTIONS, MOTOROLA APX CHARGER 4.5" EB		
DO NOT SCALE DRAWING		
SIZE A	DWG. NO. C-EB45-APX-1P-INST	REV 9-15
WEIGHT (LB): 3.40	SCALE: 1:4	SHEET 1 OF 1