


INSTALLATION INSTRUCTIONS:


- 1. Start with installing the sheet metal USB Bracket (ITEM 1), Torque to 4 in-lbs. +/-10%, Do not over tighten fasteners.
- 2. With DS-DA-311, remove the screws and lock washers that come pre-assembled to the female end of the cable
- 3. Attach the female end of the USB cable to the USB Cable Bracket. This will be done using hardware that comes with the DS-DA-311. Torque to 4 in-lbs. +/-10%, Do not over tighten fasteners.
- 4. Plug the male end of the USB Cable into a USB Port of the DS-GTC-220 Docking Station
- 5. Route the cable as shown and use the included Zip-Ties to strain relief the cable.

USB Bracket Installation

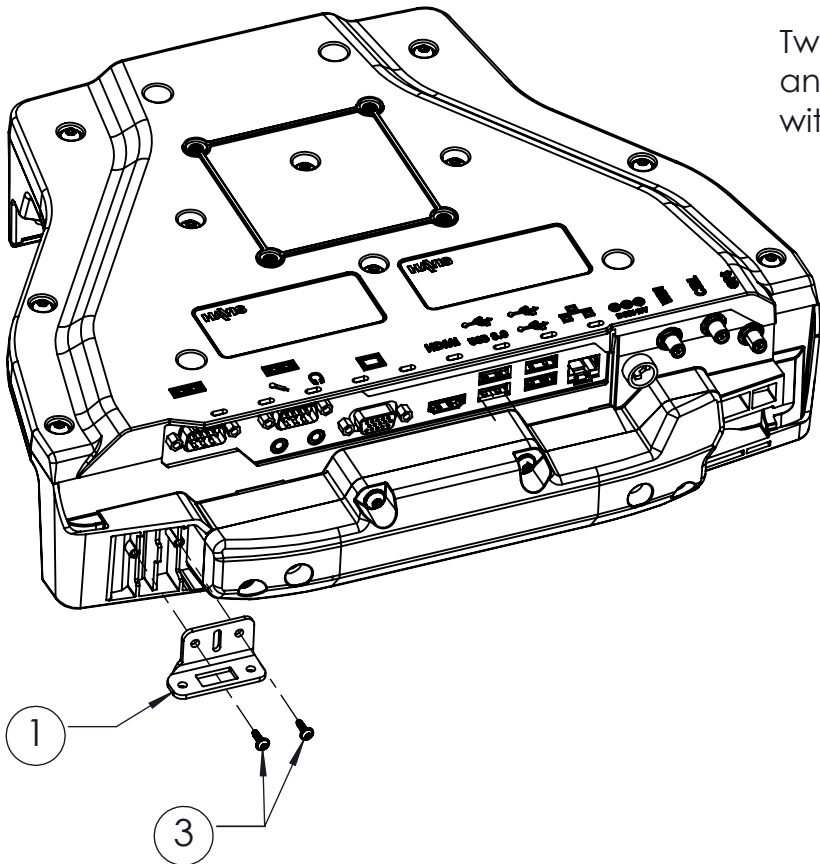


Two of the machine screw and lock washer come with the DS-DA-311 Kit

Attaching the USB Cable

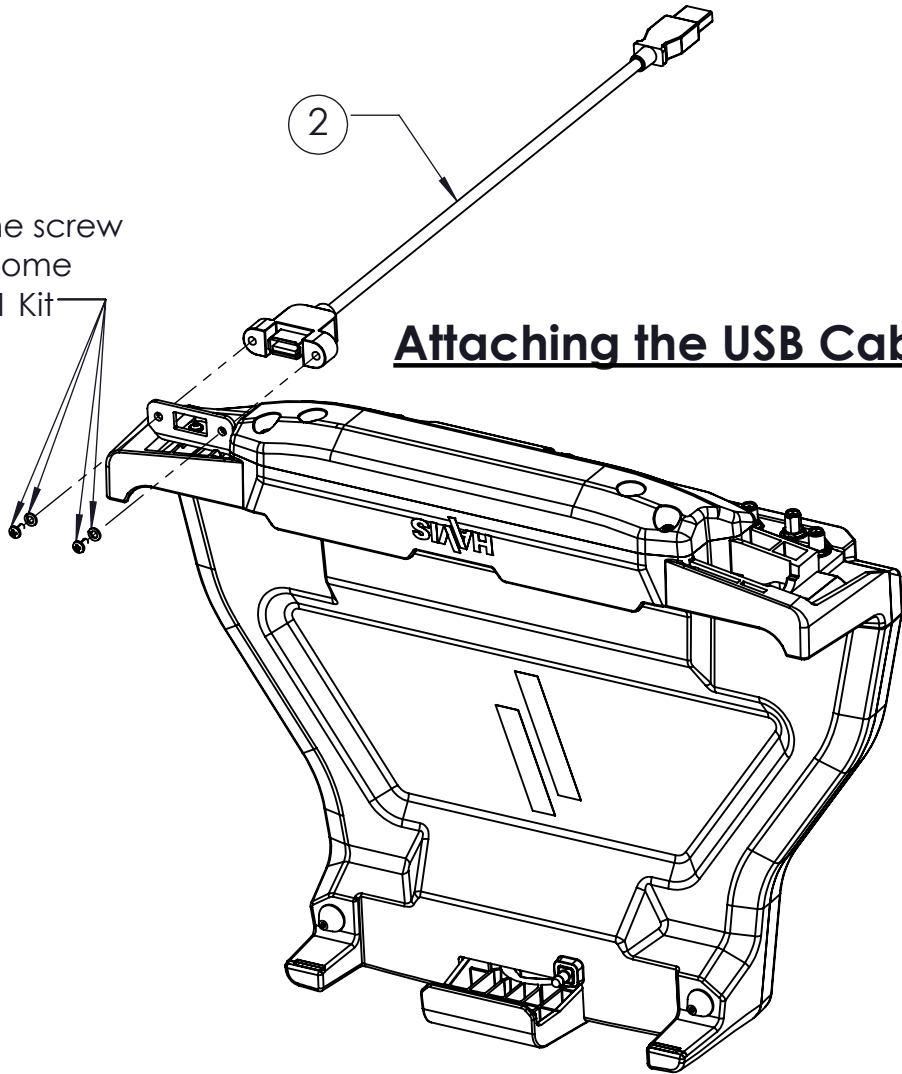

Cable Management

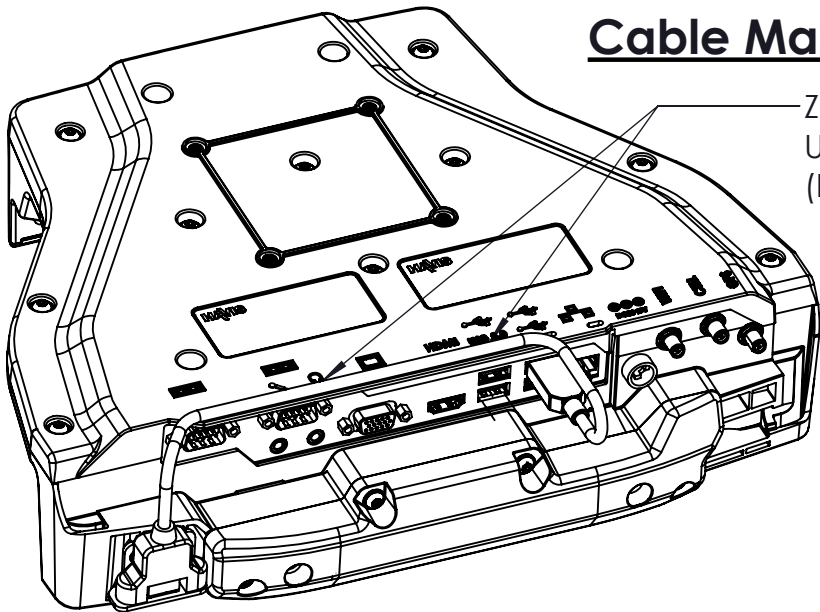

Zip-tie (ITEM 4) in these locations after plugging the USB Port into the IO of the DS-GTC-220 Docking Station. (Docking Station Not Included)

HARDWARE KIT CONTENTS:

ITEM #	DESCRIPTION	INSTALL/QTY	FINISH	DRIVE STYLE
1	FORWARD USB BRACKET	1	BLACK POWDER COAT	
2	DS-DA-311	1		PHILLIPS #1
3	THREAD FORMING SCREW	2		T8
4	Zip-Tie	2		

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

DRAWING NO.
DS-DA-337_INST_4-21
PRODUCT DESCRIPTION
**INSTALLATION INSTRUCTIONS
FOR DS-DA-337**

HAVIS
1-800-524-9900
WWW.HAVIS.COM

WEIGHT: (LBS)
REV. DATE
04-2021