


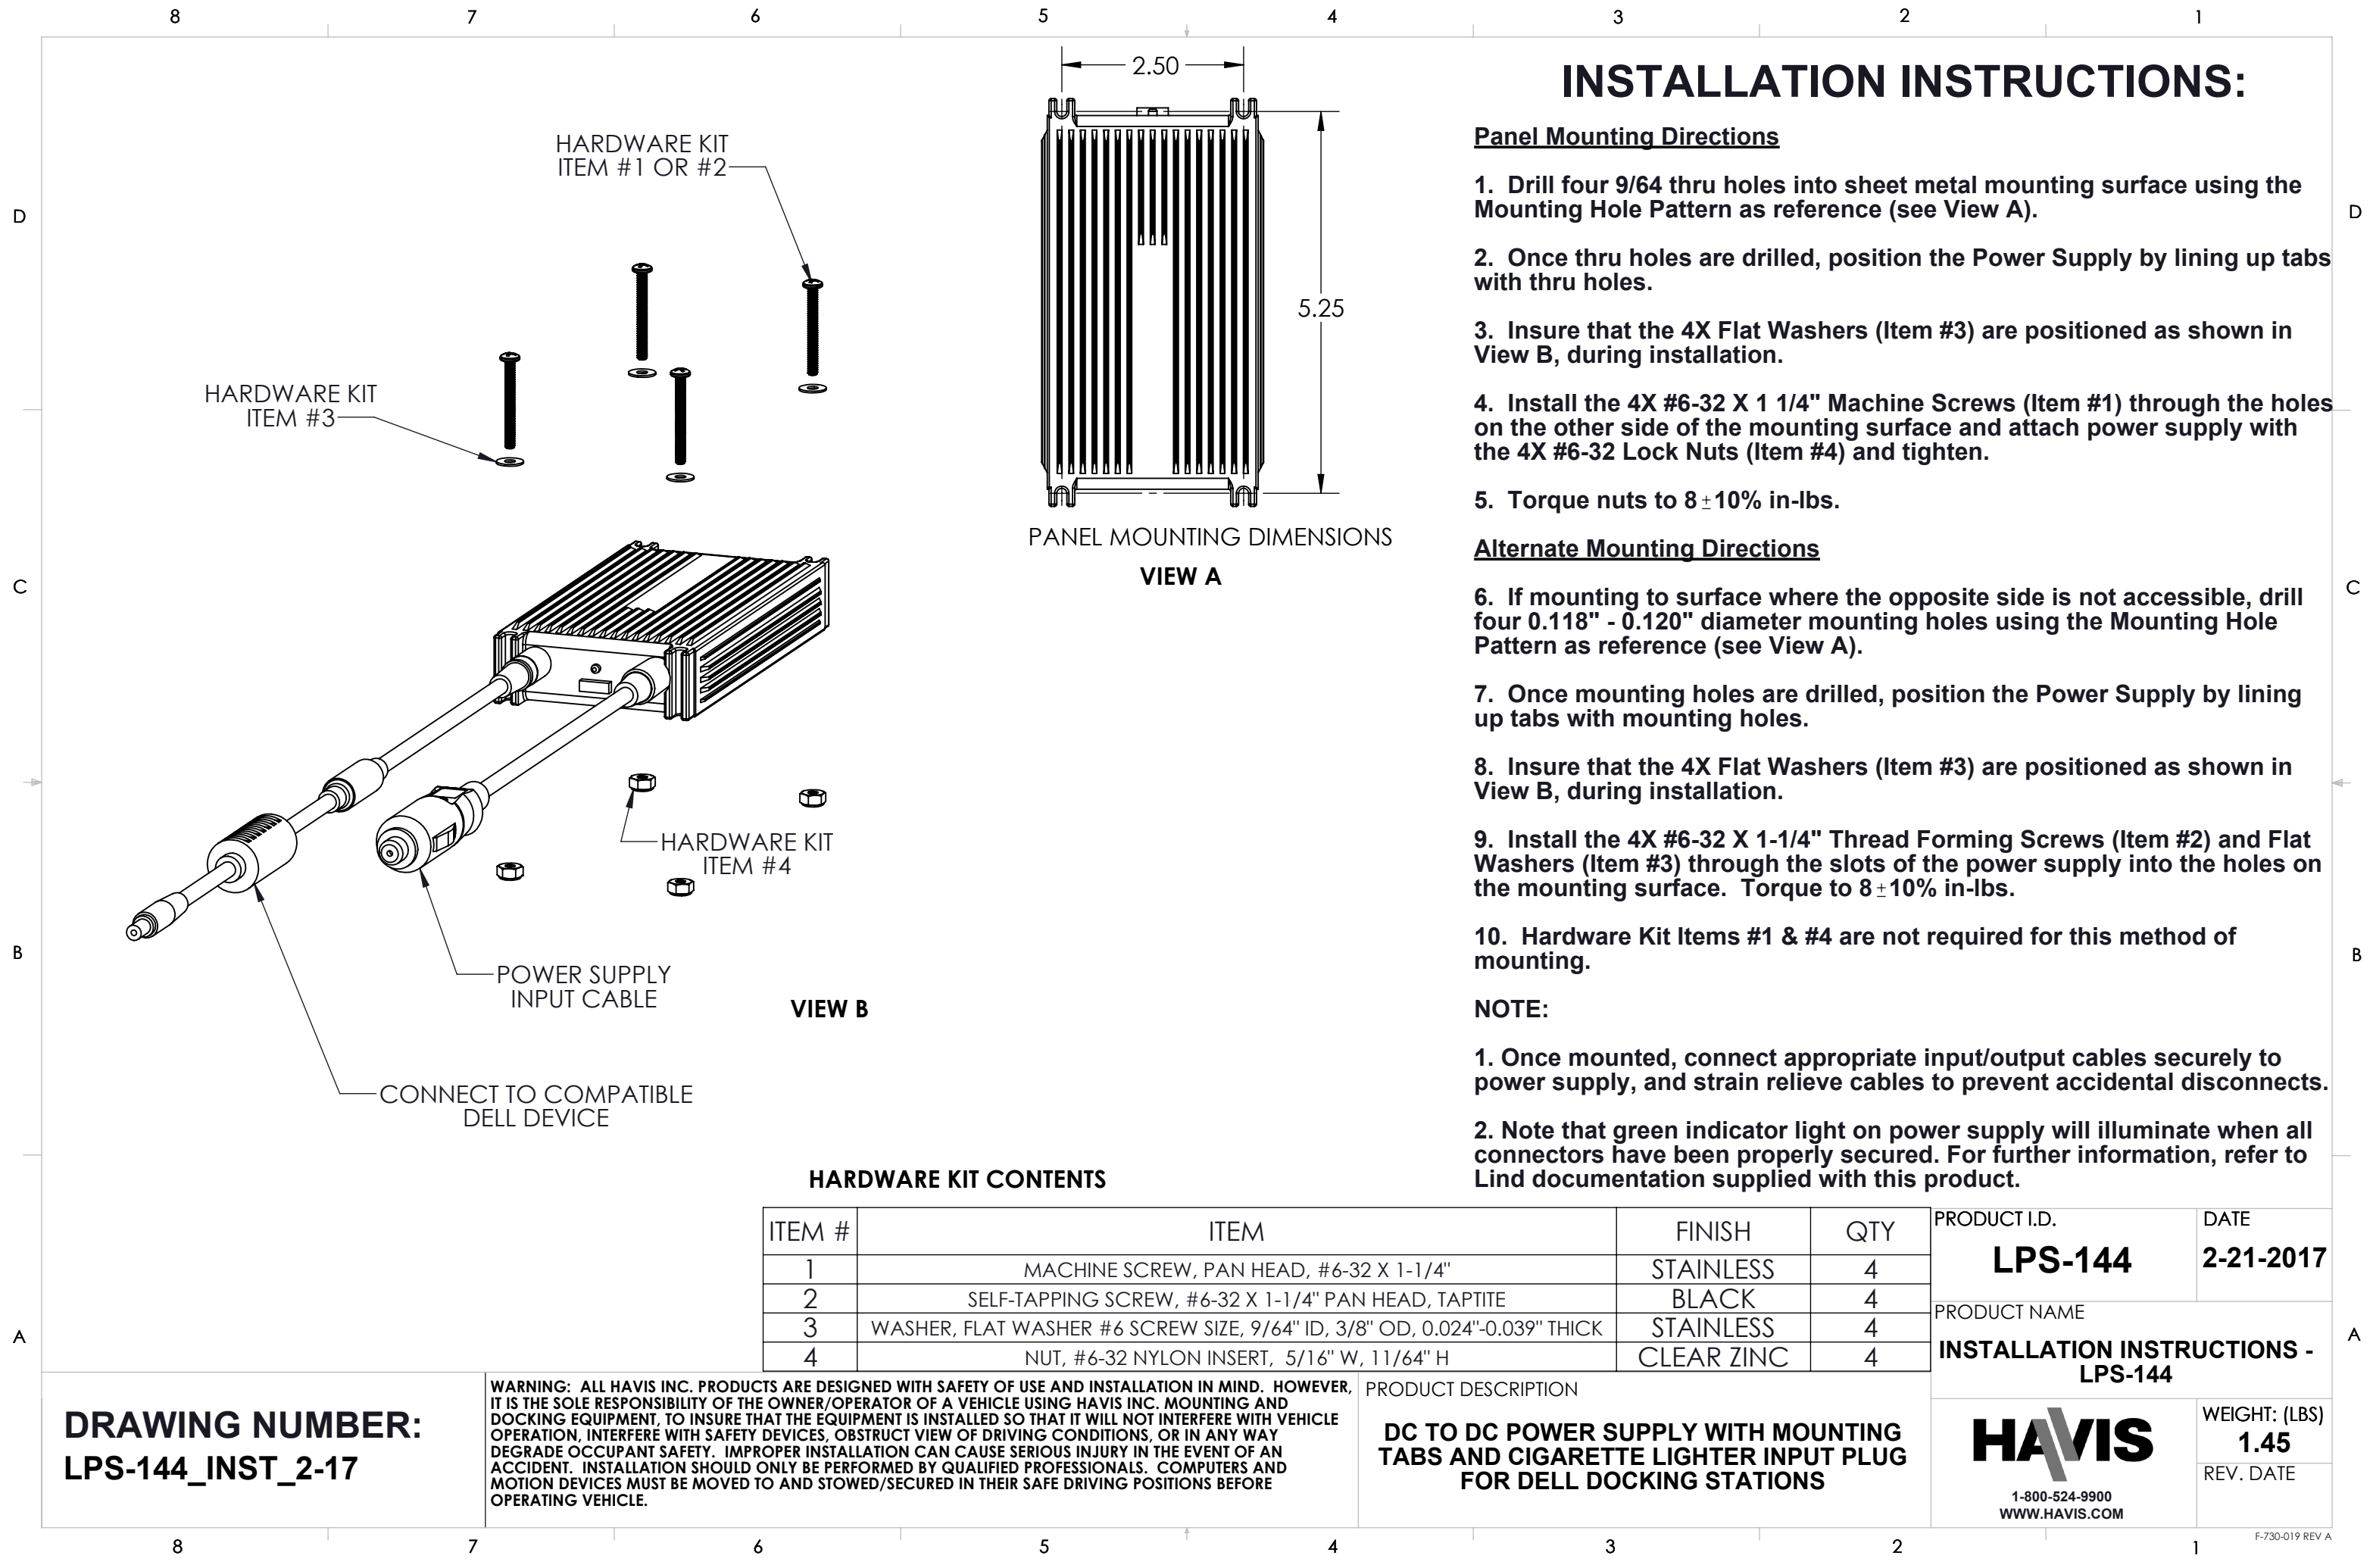

INSTALLATION INSTRUCTIONS:

Panel Mounting Directions

1. Drill four 9/64 thru holes into sheet metal mounting surface using the Mounting Hole Pattern as reference (see View A).
2. Once thru holes are drilled, position the Power Supply by lining up tabs with thru holes.
3. Insure that the 4X Flat Washers (Item #3) are positioned as shown in View B, during installation.
4. Install the 4X #6-32 X 1 1/4" Machine Screws (Item #1) through the holes on the other side of the mounting surface and attach power supply with the 4X #6-32 Lock Nuts (Item #4) and tighten.
5. Torque nuts to 8±10% in-lbs.

Alternate Mounting Directions

6. If mounting to surface where the opposite side is not accessible, drill four 0.118" - 0.120" diameter mounting holes using the Mounting Hole Pattern as reference (see View A).
7. Once mounting holes are drilled, position the Power Supply by lining up tabs with mounting holes.
8. Insure that the 4X Flat Washers (Item #3) are positioned as shown in View B, during installation.
9. Install the 4X #6-32 X 1-1/4" Thread Forming Screws (Item #2) and Flat Washers (Item #3) through the slots of the power supply into the holes on the mounting surface. Torque to 8±10% in-lbs.
10. Hardware Kit Items #1 & #4 are not required for this method of mounting.

NOTE:

1. Once mounted, connect appropriate input/output cables securely to power supply, and strain relieve cables to prevent accidental disconnects.
2. Note that green indicator light on power supply will illuminate when all connectors have been properly secured. For further information, refer to Lind documentation supplied with this product.

HARDWARE KIT CONTENTS

ITEM #	ITEM	FINISH	QTY
1	MACHINE SCREW, PAN HEAD, #6-32 X 1-1/4"	STAINLESS	4
2	SELF-TAPPING SCREW, #6-32 X 1-1/4" PAN HEAD, TAPTITE	BLACK	4
3	WASHER, FLAT WASHER #6 SCREW SIZE, 9/64" ID, 3/8" OD, 0.024"-0.039" THICK	STAINLESS	4
4	NUT, #6-32 NYLON INSERT, 5/16" W, 11/64" H	CLEAR ZINC	4

PRODUCT I.D.	DATE
LPS-144	2-21-2017

PRODUCT NAME
INSTALLATION INSTRUCTIONS - LPS-144

HAVIS 1-800-524-9900 WWW.HAVIS.COM	WEIGHT: (LBS) 1.45 REV. DATE
---	---

DRAWING NUMBER:
LPS-144_INST_2-17

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION
DC TO DC POWER SUPPLY WITH MOUNTING TABS AND CIGARETTE LIGHTER INPUT PLUG FOR DELL DOCKING STATIONS